

# Residential/Light Commercial Generator Accessories


## KOHLER Power Systems

### Fuel Regulator Heater Kits

**ISO 9001**  
KOHLER  
POWER SYSTEMS  
NATIONALLY REGISTERED



GM79141-KP1-QS  
20RES/20RESA/20RESB  
120 VAC

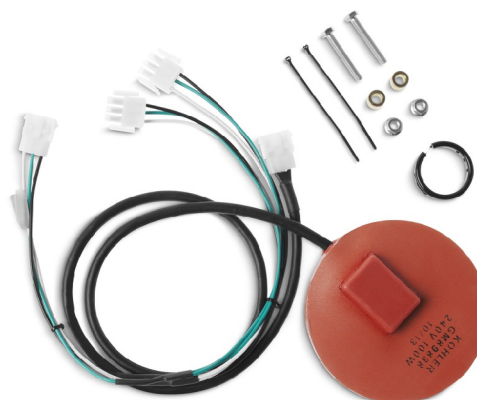

GM79141-KP2-QS  
20RESA/20RESB  
240 VAC

## Applicable Models

- 20RES/RESL
- 20RESA/RESAL
- 20RESB

## Description

Regulator heater kits are designed for Kohler® 20 kW residential/light commercial generator sets. The regulator heater kit is recommended for reliable engine starting in temperatures from -18°C to -29°C (0°F to -20°F).

The regulator heater is a 127 mm (5 in.) diameter round heating pad with a snap action thermostat and a power cord. The heating pad mounts directly on the fuel regulator, which is located on the air intake side of the generator set.

Fuel regulator heater kits are available in 120 volt or 240 volt versions.

**Note:** The heater requires a continuous source of AC power. The generator set must be connected to an AC power source that is backed up by the generator set.

## Kit Contents

Models: 20RES/RESL/RESA/RESAL/RESB		
Kit	GM79141-KP1-QS	GM79141-KP2-QS
Description	Qty.	Qty.
Adapter harness	—	1
Adapter, receptacle, 3-wire	1	—
Bushing	1	1
Heater, regulator pad	1	1
Installation Instructions	1	1
Nut, hex	2	2
Screw, hex cap	2	2
Spacer, steel	2	2
Tie, cable	2	2

## Specifications

Kit Number	GM79141-KP1-QS	GM79141-KP2-QS
Heater rating	120 VAC, 60 W 50/60 Hz	240 VAC, 100 W 50/60 Hz
Thermostat	4°C/13°C (40°F/55°F) Snap action	
Pad diameter	127 mm (5 in.)	
Cord length	914 mm (36 in.)	

**DISTRIBUTED BY:**

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator distributor for availability.

© 2014 by Kohler Co. All rights reserved.